

SCHULZ

SRP Rotary Screw
Air Compressors



SRP 3000 COMPACT ROTARY SCREW AIR COMPRESSORS



PERFORMANCE IN A COMPACT DESIGN

Highly efficient compact models

The COMPACT line of Schulz Rotary Screw air compressors offers superior performance in a compact package. Featuring a tank mounted solution, these compressors present an efficient design which integrates technology and performance for any application.

**SELECT THE BEST OPTION
FOR YOUR COMPANY!**



SRP 3008



SRP 3015




SRP 3025



SRP 3040

MODEL	CODE	Max. Press.		Motor				Discharge Connection	Effective Flow		Weight	ASME Tank	Dimensions (H x W x D)	Noise Level
		bar	PSIG	hp	Kw	phase	volt		CFM	l/min				
SRP 3008 COMPACT	970.3891-0	8.6	125	7,5	5,5	three	208-230/460	1/2"	25	722	373	60 horiz	42 x 35 x 18	83
SRP 3008 COMPACT	970.3890-0	8.6	125	7,5	5,5	single	230	1/2"	25	722	373	60 horiz	42 x 35 x 18	83
SRP 3015 COMPACT-II	970.3454-0/F	8.6	125	15	11	three	208-230/460	3/4"	51	1,444	463	60 horiz	55 x 53 x 24	86
SRP 3025 COMPACT	970.2840-0	8.6	125	25	18	three	208-230/460	3/4"	89	2,510	864	80 horiz	60 x 61 x 26	86
SRP 3040 COMPACT	970.3233-0	8.6	125	40	30	three	208-230/460	1"	150	4,247	1290	120 horiz	71 x 64 x 30	91

SRP 4000R DYNAMIC ROTARY SCREW AIR COMPRESSORS

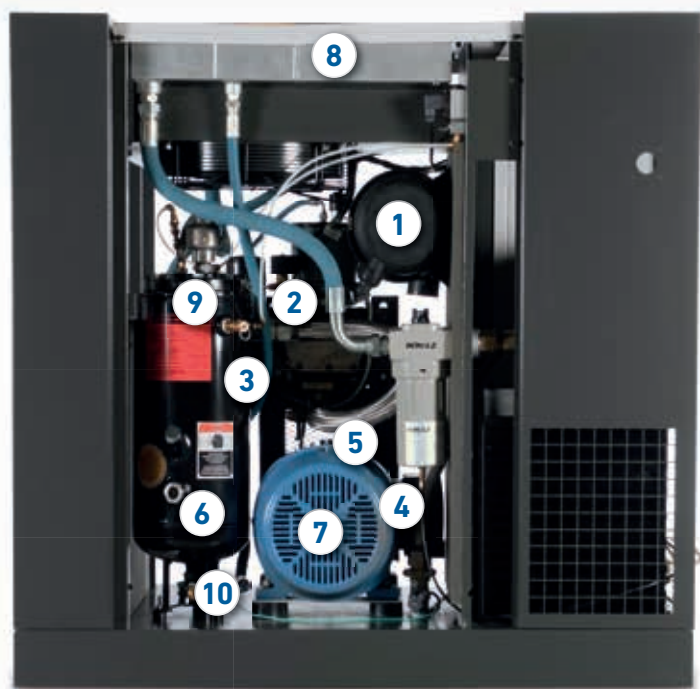

- | | |
|---------------|--------------------------|
| 1 Air Filter | 6 Air/Oil Separator |
| 2 Inlet Valve | 7 Main motor |
| 3 Oil Filter | 8 Air/Oil cooler |
| 4 Belt Drive | 9 Minimum pressure valve |
| 5 Air end | 10 Oil level gauge |

Safety

Schulz builds safety into the design of each compressor. SRP 4000 compressors were developed according to U.S. National Standards including a disconnect switch in the protection cabin, 24 V electric control panel, protection in the hot and rotating parts

of the compressor and ASME certified air/oil tank. All this to ensure maximum safety and protection to the user during the operation of the equipment. Care in the design also considers maintenance so that the arrangement of the components in the machine facilitates access to the service points, allowing the parts to be changed in a practical and safe way.

MODEL	CODE	Max. Press.		Motor				Effective Flow		Discharge Connection	Weight	ASME Tank	Dimensions (H x W x D)	Noise Level
		bar	PSIG	hp	kW	phase	volt	CFM	l/min	in / pulg	lb	gal	inches	dB(A)
SRP 4008 DYNAMIC	970.3980-0	8,6	125	7.5	5.5	single	230	25	722	1/2	500	60	53.5 x 49.4 x 23.6	69
	970.4075-0					three	208-230/460							
SRP 4010 DYNAMIC	970.3902-0	8,6	125	10	7.5	three	208-230/460	35	991	3/4	613	120	39.8 x 58.5 x 27.6	69
SRP 4015 DYNAMIC	970.3455-0	8,6	125	15	11	three	208-230/460	51	1,444	3/4	639	120	39.8 x 58.5 x 27.6	69
SRP 4020E DYNAMIC	970.3903-0	8,6	125	20	15	three	208-230/460	74	2,093	1	1,146	120	39.8 x 58.5 x 30.3	68
SRP 4025E DYNAMIC	970.3904-0	8,6	125	25	18.5	three	208-230/460	92	2,605	1	1,178	120	39.8 x 58.5 x 30.3	69
SRP 4030E DYNAMIC	970.3907-0	8,6	125	30	22	three	208-230/460	117	3,312	1	1,187	120	39.8 x 58.5 x 30.3	70
SRP 4040E DYNAMIC	970.3977-0	8,6	125	40	30	three	208-230/460	150	4,247	1	1,611	120	74.8 x 74.8 x 31.9	76
SRP 4050E DYNAMIC	970.3458-0	8,6	125	50	37	three	208-230/460	207	5,862	1 1/2	1,653	-	68.9 x 65.4 x 39	76



www.schulzamerica.com



@schulzofamerica



/schulzofamerica



SCHULZ OF AMERICA, INC.

3500, Lake City Industrial Court - Acworth, GA 30101
Phone # (770) 529.4731- Fax # (770) 529.4733
sales@schulzamerica.com



SCHULZ COMPRESSORES - BRAZIL

Rua Dona Francisca, 6901 A - Distrito Industrial
89219-600 - Joinville - SC - Fone: +55 47 3451.6000
schulz@schulz.com.br



SCHULZ - CHINA

Building no. 3 (South) - No. 19, Zheng Lang Road
FengXian District - Shanghai, China
ZIP CODE: 201413



Av. Indianópolis, 1435 - Planalto Paulista - 04063-002
São Paulo - SP - Fone: +55 11 2161.1300
schulzsp@schulz.com.br